

AXS

Wall/Ceiling Fans (100, 125 & 150mm)

100mm and 125mm fans – IP24 rated.

Multiple fixing locations making the fan ideal for refurbishment applications



Accessories

ED1/ED150

Easyfix ducting plastic wall liner with integral screw-fixing channels.



Flexiduct

Flexible 100mm, 125mm & 150mm PVC ducting.



FF100

Fast fix wall duct system. Comprises 100mm PVC duct with external wall duct seal and external grille. Available in white or brown.



EG1/EG2

Fixed blade louvred grille in semi-matt ABS plastic. Available in white or brown.



GG42/GG82/GG84

100, 125 & 150mm external louvred wall vent, available in white or brown.




Physical Specifications


Weight: 100mm fan – 0.54kg
125mm fan – 0.87kg
150mm fan – 0.99kg

Material: White gloss finish ABS plastic.

Dimensions

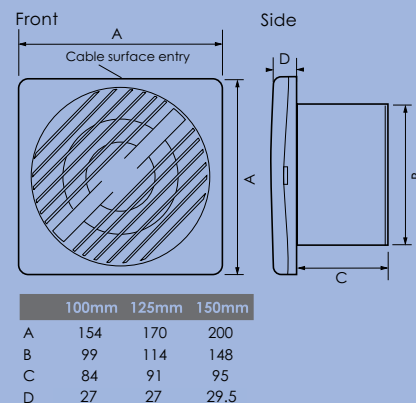

Performance Graph

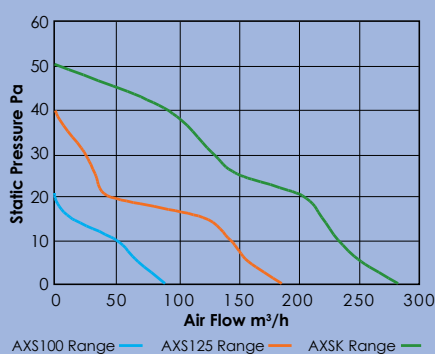

Electrical Specifications

230V~50Hz Class II

Consumption: AXS100 17W
AXS125 28W
AXSK 33W

Motor thermally protected by overload fuse.

Cabling: 1.5mm² Ø max.

Data Table

	Performance in free air m³/h¹ Ls⁻¹		Sound Pressure level @ 3m dB(A)	IP Rating	Operation	Features
AXS100/AXS100PC	90	25	33	24	Single speed	100mm fan, basic or with pull cord
AXS100TR/AXS100T	90	25	33	24	Single speed	100mm fan with timer, remote operation or overrun timer and pull cord
AXS100HTR*/AXS100HT	90	25	33	24	Single speed	100mm fan with humidistat/timer, remote operation or with pull cord
AXS125*/AXS125PC*	185	51	41	24	Single speed	125mm fan, basic or with pull cord
AXS125TR*	185	51	41	24	Single speed	125mm fan with timer, remote operation
AXS125HTR*	185	51	41	24	Single speed	125mm fan with humidistat/timer, remote operation
AXSK	280	78	43	22	Single speed	150mm fan with pull cord
AXSKTR*	280	78	43	22	Single speed	150mm fan with timer, remote operation
AXSKMA	280	78	43	22	Dual speed	150mm fan with humidistat/timer and pull cord

*Available subject to minimum order quantity of 250 units.