

D330SAWH

Duceri Emergency Hanging Exit Sign 3W LED IP20 All Legends Lithium Battery Switchable Self-Test White

General Information



Our products are designed to comply with the recommended codes of practice for emergency lighting of premises and be installed by competent person in accordance with the relevant wiring regulations.

Luminaire Information


Rated Input Supply:	AC 230V 50Hz
Rated Output Power:	16 x SMD LED 2835
Operating Temperature:	0 to 45°C
Operating Relative Humidity:	Less than 90%
Battery Specification:	3.2V 1800mAh LiFePO4
Emergency Duration:	More than 3 Hours
Change Over Time:	Less than 1 Second

Monitoring:

Green indicator lamp (LED) normally continuously 'on'. Indicator lamp goes out if AC supply or charger fails.



The latest product manuals and software is available online:
https://www.espuk.com/technical_support



Test Record Sheet

Month	Test	1st Year		2nd Year		3rd Year		4th Year		5th Year	
		Sign	Date	Sign	Date	Sign	Date	Sign	Date	Sign	Date
1	Functional										
2	Functional										
3	Functional										
4	Functional										
5	Functional										
6	1 Hour										
7	Functional										
8	Functional										
9	Functional										
10	Functional										
11	Functional										
12	3 Hour										

Luminaire Type/Ref:

Date of Installation:

Location:

Installation



Fig 1

- Provide power to the required point of installation.
- Remove the 2 screws on top of the fitting as shown in fig 1.
- Mark the location of the fixing holes and drill the holes ensure not to infringe with any joists, gas or water pipes, or electrical cables.
- For non-maintained operation please wire up the fitting as shown in fig 2.
- For maintained operation please wire up the fitting as shown in fig 3.
- For switched maintained operation please wire up the fitting as shown in fig 4.




Fig 2




Fig 4





Fig 3

- For switchable maintained operation see fig 4.
- Connect the battery via the plug and socket on the PCB
- Switch on the power supply and ensure the LED indicator is illuminated green

- Switch on the power supply and ensure the LED status indicator is illuminated green to ensure the battery and supply are functioning.
- After a 36 hour continuous charge, a full battery discharge should occur. This will ensure correct battery reset. Once the batteries have successfully depleted, mains power should be reapplied to the system.
- Normal maintenance procedures should occur once mains power has been reapplied.

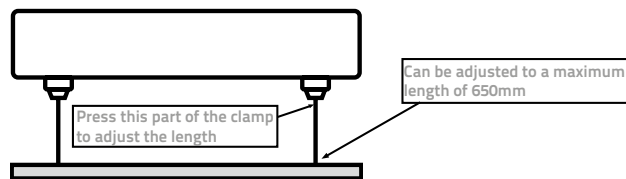

The height of the sign can be adjusted via the compression clamp on the luminaire.

Self test switch mode

- Set switch to desired mode as shown in fig 5.
- Apply mains power and then the battery after self test mode has been set.
- Refer to the self test manual instructions



Fig 5

Warning

- This product must be disconnected from the circuit if subjected to voltages higher than 1480V or insulation resistance testing. Irreparable damage will occur if this instruction is not followed.
- Daily check - check that the status Green LED indicator is illuminated
- Monthly - functional test - simulate a mains supply failure for approx. 30 seconds by operation of keyswitch or switching off a circuit breaker. Ensure normal supply is restored after test and the indicator status LED is illuminated.
- Bi annually - conduct a one hour duration test - simulate a mains supply failure for one hour continuous test by operation of keyswitch or switching off a circuit breaker. Ensure normal supply is restored after test and the indicator status LED is illuminated.
- Annually - full three hour duration test - conduct a three hour continuous duration test. Simulate a mains supply by operation of keyswitch or switching off a circuit breaker. Ensure normal supply is restored after test and the indicator status LED is illuminated.
- If the luminaire fails any of the above tests, please contact a qualified electrician. See overleaf for test record sheet.

General


The LEDs fitted in this product are non-replaceable. The unit should be recycled in the correct manner when it reaches the end of its life. Check local authorities for where facilities exist. Clean with a soft dry cloth only, do not use aggressive cleaning products or solvents which may damage the fitting.

General Instructions

These instructions should be read carefully and retained after installation by the end user for future reference and maintenance.

Safety

- Installation of this luminaire should only be carried out by a qualified electrician, or competent person to the current wiring regulations.
- Please isolate mains prior to installation/maintenance
- Check the total load on the circuit (including when this luminaire is installed) does not exceed the rating of the circuit cable, fuse or circuit breaker.
- Please note the IP (ingress Protection) rating of this luminaire when deciding the location for installation.
- This product is Class II double insulated
- This product is non-dimmable
- This product is IP20 Rated.

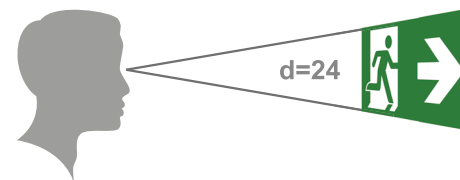

Elite Security Products UK, Unit 7 Target Park, Shawbank Road, Lakeside, Redditch, Worcestershire, B98 8YN

ESP
Scolmore GROUP

Tel: +44(0) 1527 51 51 50 Fax: +44(0) 1527 15 01 43 Email: info@espuk.com
Registered in England; Company Registration Number: 02769392; VAT Registration: GB614686525

For more product information please visit www.espuk.com
E&OE - Errors and Omissions Excepted. B25